



YOUR ELECTRICAL EXPERTS

Schools & Colleges



June - August 2025

F4P 2 - 5 | Fusion Luminares 5 - 11 | Fusion Lamps 12 - 14 | Heatstore 15 - 16
Levanté 15 - 16 | Heatstore 15 - 16 | Addvent 16 | MCG Industrial 17 - 23

Terms and conditions apply. All products are subject to availability and prices correct at the time of print. All prices are exclusive of VAT.

INSECT CONTROL

Insect Killer

- Aluminium alloy body with large killing grid
- Specially designed for maximum insect attraction
- Mounted: Wall, suspended or freestanding
- Guarantee: 1 Year

Includes:

- Lamps
- Removable collection tray
- Suspension chain



F4P

Code	Wattage	No. of Lamps	Room Coverage	1+	3+
Lamp Type: T8					
2811-1642	16W	2 x 8W	50 m ²	£57.99	£56.56
2811-1645	30W	2 x 15W	100 m ²	£60.04	£58.32
2811-1648	40W	2 x 20W	150 m ²	£76.95	£73.95

For replacement lamps, search 'Flykiller lamps' at cef.co.uk

Delivery options to suit you

Free national delivery on online orders over £50 – Free delivery from your local branch

CLEANING WIPES

Heavy-Duty Wipes

- Removes paint, adhesives, epoxy, PU foam, oil, grease and more from hands, tools and surfaces
- Wipes have scrub and smooth sides
- Scrub face: A super tough cloth that loosens even the most stubborn grime and guarantees faster removal
- Smooth face: Absorbs the grime for a super clean finish
- Refreshing sports fragrance
- Dermatologically tested
- Refill pack contains 90% less plastic than standard tubs
- BS EN 1276



BIG WIPES

Visit cef.co.uk for video demonstration

Code	Description	Pack	1+	6+
Standard Wipes				
2820-8668	Tub	100 Wipes	£14.99	£13.99

Multi-Surface Wipes

- Removes paint, adhesives, epoxy, PU foam, oil, grease and more from hands, tools and surfaces
- Excellent absorbency for cleaning spillages
- Powerful cleaning with built-in skin care
- Refreshing sports fragrance
- Dermatologically tested
- Wipes are 100% biodegradable
- Refill pack contains 90% less plastic than standard tubs
- BS EN 1276



BIG WIPES

Visit cef.co.uk for video demonstrationONLY
£14.25
+VAT

Code	Description	Pack	1+	6+
Standard Wipes				
1777-5757	Tub	80 Wipes	£14.25	£13.25

Power Spray

- Ideal for cleaning larger surfaces or pretreating areas such as walls, floors and uPVC window frames before wiping clean
- Removes paint, adhesives, epoxy, PU foam, oil, grease, bitumen and more from hands, tools and hard surfaces
- A powerful, fast-acting cleaning spray with built-in skin protection
- Dermatologically tested
- Antibacterial and antiviral action
- Uses a biodegradable liquid formula
- BS EN 1276



BIG WIPES

Code	Size	1+
Standard Wipes		
1777-5796	1 Ltr	£13.25

CABLE REELS AND EXTENSION LEADS

Unswitched Extension Leads with Neon

F4P

- Can be wall mounted via rear keyhole slots
- Fitted with a 13A fused plug
- BS 1363/A
- Guarantee: 1 Year



0003-7714

FROM
£7.75
+VAT

Code	No. of Gangs	Surge Protection	Cable Length	1+	10+
0003-7714	4	No	2 m	£7.75	£7.50
0048-7948	4	Yes	2 m	£15.95	£15.75
0003-8107	6	No	2 m	£9.25	£8.95
0048-7951	6	Yes	2 m	£12.25	£11.95

Cassette Extension Reel

F4P

- Thermal cut-out with pushbutton reset
- Max. Current [fully wound]: 3A [fully unwound]: 10A
- BS EN 50525 and BS EN 61242
- Guarantee: 1 Year



ONLY
£22.75
+VAT

Code	No. of Gangs	Cable Length	1+
2211-4477	4	10 m	£22.75

Handbag Style Cable Reel

F4P

- Thermal cut-out with pushbutton reset
- Max. Current [fully wound]: 5A [fully unwound]: 13A
- BS EN 50525 and BS EN 61242
- Guarantee: 1 Year



ONLY
£48.95
+VAT

Code	No. of Gangs	Cable Length	1+
2211-4483	4	25 m	£48.95

Freestanding Cable Reel

F4P

- Thermal cut-out with pushbutton reset
- Max. Current [fully wound]: 5A [fully unwound]: 13A
- BS EN 50525 and BS EN 61242
- Guarantee: 1 Year



ONLY
£92.95
+VAT

Code	No. of Gangs	Cable Length	1+
2211-4480	4	50 m	£92.95

TIME LAG SWITCHES

Columbus® Pneumatic Time Lag Switches

Elkay
Energy Saving Switches & Controls

- No neutral required
- Timer adjustment: 5 secs - 5 mins
- Splashproof shroud kit available – sold separately [0003-6400]
- BS EN 60669-2-3:2006
- Guarantee: 3 Years



Load rating:

- 1,440W [6A] Incandescent lamps and resistive loads
- 720W [3A] LED Lamps

FROM
£26.75
+VAT

Code	Configuration	No. of Wire Connections	1+	3+
0003-7666	Single Contact	3	£26.75	£25.75

16A Pushbutton Time Lag Switches

Elkay
Energy Saving Switches & Controls

- Master switch – can be interlinked with any Elkay slave switches [only one master per circuit]
- Suitable for incandescent and fluorescent lamps and resistive loads
- Illuminated blue locator ring
- One minute countdown LED indicator
- Requires capacitor [2816-2924] for all types of low wattage loads including LED lighting [sold separately]
- Concealed fixing screws
- Timer adjustment: 2 mins - 2 hrs
- BS EN 60669-2-3



0704-0065

FROM
£47.50
+VAT

Code	No. of Wire Connections	1+	3+
Guarantee: 3 Years			
0704-0065	2	£47.95	£46.95
Guarantee: 6 Years			
0704-0113	3	£47.50	£46.50

16A Weatherproof Time Lag Switches IP66

Elkay
Energy Saving Switches & Controls

- Master switch – can be interlinked with any Elkay slave switches [only one master per circuit]
- Commonly used for outdoor patio or infrared heaters and where there is a neutral to control all load types of lighting
- Illuminated blue locator ring
- One minute countdown LED indicator
- Includes backbox with M20 knockouts
- Timer adjustment: 2 mins - 2 hrs
- Guarantee: 6 Years



Code	Type	No. of Wire Connections	1+	3+
0704-0125	Pushbutton	3	£56.75	£55.25

TIME LAG SWITCHES

10A Time Lag Switches

- Suitable for resistive loads and incandescent, fluorescent, CFL and LED lamps
- Can be linked with additional units for two way switching
- Requires 25 mm backbox
- Capacitor will often be required when switching certain types of loads – sold separately [2816-2924]
- Timer adjustment: 2 - 60 mins
- BS EN 60669



2816-2909



2816-2903

F4P

PIR Features:

- Detection angle: 360°
- Detection range: 7 m

NEW

Code	Type	No. of Wire Connections	1+	3+
Guarantee: 3 Years				
2816-2903	Pushbutton	2	£40.92	£39.78
2816-2909	PIR	3	£84.94	£82.58
Guarantee: 6 Years				
2816-2912	Pushbutton	3	£50.36	£48.96
2819-2576	PIR	3	£70.66	£68.70

10A Weatherproof Pushbutton
Electronic Time Lag Switches IP66

- Suitable for resistive loads and incandescent, fluorescent, CFL and LED lamps
- Capacitor will often be required when switching certain types of loads – sold separately [2816-2924]
- Timer adjustment: 2 - 60 mins
- BS EN 60669



F4P

Code	No. of Wire Connections	1+	3+
Guarantee: 3 Years			
2816-2906	2	£71.95	£69.95
Guarantee: 6 Years			
2816-2915	3	£57.50	£55.50

Time Lag Switches

- Saves cost and energy by automatically switching off the lights after a preset period of time
- Replaces existing lighting control
- Timer must be set before installation
- No neutral required
- Requires 25 mm backbox
- Splashproof shroud kit available – sold separately [0003-6400]
- BS EN 60669
- Guarantee: 3 Years



2816-2930



2816-2921

Code	Type	Timer Adjustment	Current Rating	No. of Wire Connections	1+	3+
2816-2930	Pneumatic	5 secs - 5 mins	6A Incandescent - 3A Fluorescent	2	£30.50	£29.50
2816-2921	Electronic	20 secs - 25 mins	5A Incandescent - 5A Fluorescent	2	£42.25	£41.25

Elkay
Energy Saving Switches & Controls

16A Two Wire PIRs

- No neutral required
- Please note: Capacitor [2816-2924] will often be required when switching certain types of loads
- Detection angle: 360°
- Detection range: 5 - 7 m
- Timer adjustment: 2 mins - 2 hrs
- Mounted: Surface or flush backbox [not included]
- Guarantee: 3 Years



Code	Description	Height	Width	Depth	1+	3+
0704-0101	Two Wire	85 mm	85 mm	8 mm	£76.95	£74.95

10A Ceiling PIR

- Neutral required
- Please note: Capacitor will often be required when switching certain types of loads – sold separately [2816-2924]
- Lux and sensitivity adjustment
- Mounting height: 2.4 m
- Detection angle: 360°
- Detection range: 10 m
- Timer adjustment: 10 secs - 1 hr
- Guarantee: 6 Years



Includes:

- White and chrome interchangeable bezels
- Surface mounting backbox

Code	Depth	Ø	Cut Out Ø	1+	3+
2816-2918	72 mm	77 mm	64 mm	£47.25	£46.25

Same day range

Almost 3,000 everyday essential products available in branch to take away today

F4P

FROM
£30.50
+VAT

LIGHTING SUSPENSION KITS AND ACCESSORIES

Easy Lock Lighting Suspension Kit

F4P

- Suitable for battens, NCFs, highbays, lowbays and luminaires
- Quick adjustment pin on clutches [no setting key required]
- Working load: 10 kg per clutch
- Safety factor: 5:1

Kit contents:

- 2 x 3 m x 1 mm Steel cables with loops
- 2 x Easy lock clutches
- 2 x Monkey puzzle suspension clips



Code	1+	10+
2639-6275	£14.75	£13.50

LED PANELS

Backlit LED TP[a] Panels IP20

- Aluminium body with low glare opal polycarbonate diffuser
- Optional emergency conversion pack – sold separately [2628-3835]
- Non-dimmable
- Lamp life: 50,000 hrs
- Mounted: Recessed
- Guarantee: 5 Years [on-site: 1 year]

Includes:

- Plug-and-play driver

***WHILE STOCKS LAST**

Code	Wattage	Lumens	Length	Width	Depth	1+	10+
Standard – Warm White – 3000K							
2676-5536 *	36W	3820 lm	595 mm	595 mm	34 mm	£24.17	£22.96
Standard – Cool White – 4000K							
2676-5530 *	36W	3820 lm	595 mm	595 mm	34 mm	£24.17	£22.96
2676-5518	36W	3820 lm	1195 mm	295 mm	34 mm	£46.75	£44.75
2676-5524	45W	4830 lm	1195 mm	595 mm	34 mm	£78.95	£76.95
Standard – Daylight – 6500K							
2676-5533 *	36W	3820 lm	595 mm	595 mm	34 mm	£24.17	£22.96
2676-5521	36W	3820 lm	1195 mm	295 mm	34 mm	£46.75	£44.75
2676-5527	45W	4830 lm	1195 mm	595 mm	34 mm	£78.95	£76.95
Low Glare UGR19 – Cool White – 4000K							
2821-3963	36W	3600 lm	595 mm	595 mm	34 mm	£29.50	£28.50

40W LED Panel Frame IP20

- Slots into a regular 600 mm x 600 mm aperture, providing an illuminated border around an existing ceiling tile
- Aluminium frame with polycarbonate lens
- Optional emergency conversion pack – sold separately [2628-3835]
- Non-dimmable
- Lumen output: 4,000 lm
- Lamp life: 25,000 hrs
- Mounted: Recessed
- Guarantee: 5 Years

Includes:

- Plug-and-play driver

Code	Length	Width	Depth	1+	10+
Standard – Cool White – 4000K					
2789-8966	595 mm	595 mm	13.5 mm	£26.95	£25.95

emitec
DATA PRODUCTS

A full range of network cabling & accessories

Ask at your local branch for further details

FUSION
Luminaires

2676-5530

FROM
£24.17
+VAT

FUSION
Luminaires

ONLY
£26.95
+VAT

LED COMMERCIAL DOWNLIGHTS AND ACCESSORIES

LED Flexi-Fit Tri-Colour Downlights IP20

- White body with opal polycarbonate diffuser
- Integrated switch to select colour temperatures
- Adjustable spring clips allow recessed mounting in downlight holes
- Selectable colour temperature: Warm white 3000K, cool white 4000K and daylight 6500K
- Interchangeable magnetic bezels available – sold separately
- Mounted: Surface or recessed
- Lamp life: 30,000 hrs
- Guarantee: 2 Years

Includes:

- Integrated driver



Visit cef.co.uk for
video demonstration

FROM
£17.75
+VAT

6W Downlight

- Lumen output: 390, 420 or 450 lm

Code	Depth	Ø	Cut Out Ø	1+	10+
2606-9203	15 mm	140 mm	55 - 100 mm	£17.75	£16.75
Code	Finish			1+	10+
Magnetic Bezel					
2606-9218	Chrome			£4.75	£4.25
2606-9215	Matt Black			£4.75	£4.25
2606-9221	Satin Nickel			£4.75	£4.25

12W Downlight

- Lumen output: 900, 930 or 960 lm

Code	Depth	Ø	Cut Out Ø	1+	10+
2827-5349	15 mm	165 mm	55 - 125 mm	£18.95	£17.95
Code	Finish			1+	10+
Magnetic Bezel					
2827-5343	Chrome			£5.50	£4.95
2827-5340	Matt Black			£5.50	£4.95
2827-5346	Satin Nickel			£5.50	£4.95

18W Downlight

- Lumen output: 1,500, 1,530, or 1,560 lm

Code	Depth	Ø	Cut Out Ø	1+	10+
2604-0979	15 mm	217 mm	55 - 175 mm	£25.95	£24.95
Code	Finish			1+	10+
Magnetic Bezel					
2604-0985	Chrome			£5.95	£5.50
2604-0982	Matt Black			£5.95	£5.50
2604-0988	Satin Nickel			£5.95	£5.50

24W Downlight

- Lumen output: 1,980, 2,010 or 2,040 lm

Code	Depth	Ø	Cut Out Ø	1+	10+
2606-9200	15 mm	290 mm	60 - 250 mm	£37.95	£36.95
Code	Finish			1+	10+
Magnetic Bezel					
2606-9209	Chrome			£7.95	£7.50
2606-9206	Matt Black			£7.95	£7.50
2606-9212	Satin Nickel			£7.95	£7.50

WEEE recycling

Ask in branch or visit
cef.co.uk/waste-recycling



LED BATTENS

Tri-Colour LED Battens IP20

- Steel body with powder-coated finish
- Polycarbonate UV stabilised diffuser
- Quick-release access system with LED array safety cords, for easy installation
- Ideal retrofit option for existing T8 or T5 fixtures
- Colour temperature: Warm white 3000K, cool white 4000K and daylight 6500K
- Lamp life: 50,000 hrs
- Dimensions: 72 mm[W] x 72.5 mm[D]
- Mounted: Surface or suspended
- Guarantee: 5 Years (on-site: 1 year)
[emergency: 2 years]

Microwave features:

- Detection angle [ceiling]: 360°
[wall]: 150°
- Detection range: 10 m
- Timer adjustment: 5 secs, 30 secs,
90 secs, 5 mins, 20 mins or 30 mins



Visit cef.co.uk for
video demonstration

Code	Size	Wattage	Sensor	Lumens	Length	Price		
Standard								
2756-5063	2 ft	10W	No	1200 lm	600 mm	1+	£29.95	10+ £29.20
2756-5066	4 ft	20W	No	2400 lm	1200 mm	1+	£31.95	10+ £31.15
2756-5075	4 ft	40W	No	4800 lm	1200 mm	1+	£48.75	10+ £47.55
2756-5081	5 ft	30W	No	3600 lm	1500 mm	1+	£36.50	10+ £35.60
2756-5093	5 ft	30W	Microwave	3600 lm	1500 mm	1+	£55.50	10+ £54.10
2756-5099	5 ft	60W	No	7200 lm	1500 mm	1+	£50.25	10+ £48.95
2756-5105	5 ft	60W	Microwave	7200 lm	1500 mm	1+	£76.95	10+ £75.05
2756-5111	6 ft	40W	No	4800 lm	1800 mm	1+	£44.95	10+ £43.85
2756-5117	6 ft	67W	No	8040 lm	1800 mm	1+	£64.95	10+ £63.35
3 hr Maintained Emergency								
2756-5072	4 ft	20W	No	2400 lm	1200 mm	1+	£76.95	3+ £75.05
2756-5078	4 ft	40W	No	4800 lm	1200 mm	1+	£94.95	3+ £92.60
2756-5087	5 ft	30W	No	3600 lm	1500 mm	1+	£81.95	3+ £79.90
2756-5096	5 ft	30W	Microwave	3600 lm	1500 mm	1+	£97.50	3+ £95.05
2756-5102	5 ft	60W	No	7200 lm	1500 mm	1+	£92.50	3+ £90.20
2756-5108	5 ft	60W	Microwave	7200 lm	1500 mm	1+	£116.95	3+ £114.05
2756-5114	6 ft	40W	No	4800 lm	1800 mm	1+	£87.25	3+ £85.05
2756-5120	6 ft	67W	No	8040 lm	1800 mm	1+	£102.50	3+ £99.95



LED LINEAR FITTINGS

Aten LED Linear Fittings IP20



- Glass-free lighting solution ideal for kitchens
- Powder-coated aluminium body with PMMA opal diffuser and polycarbonate end caps
- Colour temperature: Cool white 4000K
- Lamp life: 30,000 hrs
- Dimensions: 33 mm[W] x 45 mm[D]
- Mounted: Surface
- Guarantee: 2 Years



FROM
£31.75
+VAT

Code	Size	Wattage	Lumens	Length	1+	10+
1994-9083	2 ft	25W	2000 lm	594 mm	£31.75	£30.95
1994-9077	4 ft	48W	4300 lm	1194 mm	£55.95	£54.50
1994-9080	5 ft	48W	4800 lm	1494 mm	£64.95	£63.50

Aten2 LED Tri-Colour
Linear Fittings IP20

- Glass-free lighting solution ideal for kitchens
- Powder-coated aluminium body with PMMA opal diffuser and polycarbonate end caps
- Selectable colour temperature: Warm white 3000K, cool white 4000K and daylight 6000K
- Switch the unit Off then On within three seconds and the fitting will switch between colour temperatures
- Once desired colour is selected, leave on for ten seconds and the fitting will remember desired colour
- Lamp life: 30,000 hrs
- Dimensions: 133 mm[W] x 45 mm[D]
- Mounted: Surface
- Guarantee: 2 Years



Code	Size	Wattage	Lumens	Length	1+	10+
1994-9083	2 ft	25W	1900 lm / 2100 lm / 2200 lm	594 mm	£33.95	£32.50
1994-9077	4 ft	48W	3600 lm / 3800 lm / 4000 lm	1194 mm	£61.50	£60.05
1994-9080	5 ft	48W	4100 lm / 4500 lm / 4700 lm	1494 mm	£67.75	£66.25

LED NON-CORROSIVE FITTINGS

LED Non-Corrosive Fittings IP65

- Polycarbonate body and purpose-designed opal diffuser
- Colour temperature: Cool white 4000K
- Lamp life: 50,000 hrs
- Impact rating: IK08
- Mounted: Surface or suspended
- Warranty: 5 Years [on-site: 1 year]
[emergency: 2 years]

Microwave features:

- Detection angle [ceiling]: 360°
[wall]: 150°
- Detection range: 10 m
- Timer adjustment: 5 secs, 30 secs,
90 secs, 5 mins, 20 mins or 30 mins

Includes:

- Stainless steel fixing clips
- Gear tray extension cords



Code	Size	Wattage	Lumens	Length	Width	Depth	Price		
Standard									
2613-7831	2 ft	9W	1100 lm	600 mm	96 mm	79 mm	1+	£23.48	10+ £22.46
2613-7834	2 ft	18W	2200 lm	600 mm	96 mm	79 mm	1+	£30.19	10+ £28.88
2613-7894	4 ft	18W	2200 lm	1200 mm	96 mm	79 mm	1+	£31.81	10+ £30.43
2613-7840	4 ft	40W	4800 lm	1200 mm	96 mm	79 mm	1+	£42.07	10+ £40.24
2613-7846	5 ft	23W	2800 lm	1500 mm	96 mm	79 mm	1+	£36.61	10+ £35.02
2613-7852	5 ft	48W	5800 lm	1500 mm	96 mm	79 mm	1+	£47.82	10+ £45.74
2613-7858	6 ft	27W	3200 lm	1800 mm	96 mm	83 mm	1+	£44.95	10+ £42.99
2613-7864	6 ft	55W	6600 lm	1800 mm	96 mm	83 mm	1+	£65.65	10+ £62.79
Standard – Microwave Sensor									
2726-9278	5 ft	23W	2800 lm	1500 mm	96 mm	79 mm	1+	£60.85	10+ £58.21
2726-9272	5 ft	48W	5800 lm	1500 mm	96 mm	79 mm	1+	£74.65	10+ £71.41
3 hr Maintained Emergency									
2613-7837	4 ft	18W	2200 lm	1200 mm	96 mm	79 mm	1+	£71.88	3+ £68.75
2613-7843	4 ft	40W	4800 lm	1200 mm	96 mm	79 mm	1+	£87.40	3+ £83.60
2613-7849	5 ft	23W	2800 lm	1500 mm	96 mm	79 mm	1+	£79.54	3+ £76.08
2613-7855	5 ft	48W	5800 lm	1500 mm	96 mm	79 mm	1+	£93.25	3+ £89.19
2613-7861	6 ft	27W	3200 lm	1800 mm	96 mm	83 mm	1+	£89.99	3+ £86.08
2613-7867	6 ft	55W	6600 lm	1800 mm	96 mm	83 mm	1+	£112.99	3+ £108.08
3 hr Maintained Emergency – Microwave Sensor									
2726-9281	5 ft	23W	2800 lm	1500 mm	96 mm	79 mm	1+	£106.09	3+ £101.48
2726-9275	5 ft	48W	5800 lm	1500 mm	96 mm	79 mm	1+	£124.10	3+ £118.71



LED UNDER CUPBOARD AND CABINET LIGHTING

LED Slimline Colour Selectable Under Cabinet Lights IP20

- Suitable replacement for traditional T4 and T5 fluorescent fittings
- Compact, surface mounted design
- Selectable colour temperature:
Warm white 3000K and cool white 4000K
- Beam angle: 150°
- Lamp life: 30,000 hrs
- Warranty: 3 Years

Includes:

- 1.5 m Mains cable
- 170 mm Link cable
- Fixing brackets
- Connector

Code	Wattage	Length	Lumens	1+	5+
2795-8372	4W	225 mm	400 lm	£15.95	£15.50
2795-8369	4W	288 mm	450 lm	£17.50	£17.05
2795-8378	7W	516 mm	850 lm	£20.95	£20.50
2795-8360	13W	849 mm	1500 lm	£25.95	£25.25
2795-8363	18W	1149 mm	1800 lm	£29.95	£29.25



CCT Colour Select

Link Cables

- For use with Fusion under cabinet lights



Code	Length	1+	5+
2795-8366	250 mm	£2.22	£2.15
2795-8375	500 mm	£3.34	£3.23
2795-8357	1000 mm	£4.45	£4.30



ALL PRICES EXCLUDE VAT

BULKHEADS

12W / 16W Dome LED Tri-Colour Bulkheads IP65

- Polycarbonate body and opal diffuser
- Screwless twist-and-lock bezel
- Selectable colour temperature: Warm white 3000K, cool white 4000K and daylight 6500K
- Switch located on the driver takes the fitting down to 12W for increased energy savings
- Lumen output [12W]: 1,200 - 1,300 lm
[16W]: 1,600 - 1,700 lm
- Warranty: 5 Years [on-site: 1 year]
[emergency: 2 years]

Code	Sensor	Lamp Life	Depth	Ø	Price			
Standard								
2704-3078	No	30000 hrs	82.5 mm	320 mm	1+	£23.60	5+	£22.15
2704-3147	Microwave	30000 hrs	82.5 mm	320 mm	1+	£42.95	5+	£40.95
3 hr Maintained Emergency								
2704-3144	No	20000 hrs	82.5 mm	320 mm	1+	£44.60	3+	£42.60
2704-3150	Microwave	20000 hrs	82.5 mm	320 mm	1+	£64.95	3+	£62.95
Code	Colour					1+	3+	
Bezels – To Be Ordered Separately								
2722-3345	Chrome					£7.95	£7.75	
2722-3348	Polished Brass					£12.95	£12.75	

- Microwave features:
- Detection angle: 360°
 - Detection range: 10 m
 - Timer adjustment: 5 secs - 10 mins



Visit cef.co.uk for video demonstration

FROM
£23.60
+VAT

LED EMERGENCY LIGHTING AND ACCESSORIES

LED Emergency Bulkheads IP65

- High quality polycarbonate body and diffuser with hinged gear tray
- LiFePO4 battery technology greatly improves operational life and charging cycle capacity
- Emergency duration: 3 hrs
- Colour temperature: Daylight 6500K
- Emergency lumen output: 110 lm [maintained / non-maintained only]
- Lumen output: 170 lm
- Lamp life: 30,000 hrs
- Mounted: Surface
- Warranty: 2 Years

Code	Wattage	Type	Emergency Type	Height	Width	Depth	1+	3+
2816-1985	1.1W	Standard	Non-Maintained	107 mm	349 mm	64 mm	£16.50	£15.95
2816-1979	2.3W	Standard	Maintained / Non-Maintained	107 mm	349 mm	64 mm	£17.95	£17.50
2816-1982	2.3W	Auto Self-Test	Maintained / Non-Maintained	107 mm	349 mm	64 mm	£22.95	£22.50

Includes:

- ISO 7010 Legend pack

2.7W LED 5-In-1 Maintained / Non-Maintained Emergency Droplights IP20



- Polycarbonate housing
- Test button and charge indicator LED
- Emergency duration: 3 hrs
- Emergency lumen output: 14 lm
- Lumen output: 23 lm
- Lamp life: 30,000 hrs
- Mounted: Ceiling, suspended, recessed, side or wall
- Guarantee: 2 Years



Code	Type	Legend	Height	Width	Depth	1+	3+
2658-8812	Standard	Exit Arrow Up	180 mm	264 mm	28 mm	£35.95	£33.95

3W LED Non-Maintained Emergency Twinspots IP65



- Polycarbonate construction
- LiFePO4 battery technology greatly improves operational life and charging cycle capacity
- Emergency duration: 3 hrs
- Colour temperature: Daylight 6500K
- Lumen output: 297 lm
- Lamp life: 30,000 hrs
- Guarantee: 2 Years



Code	Type	Height	Width	Depth	1+	3+
2658-8821	Standard	281 mm	297 mm	89 mm	£45.50	£43.50

LED EMERGENCY LIGHTING AND ACCESSORIES

3.5W LED Maintained / Non-Maintained Emergency Exit Boxes IP20

- Polycarbonate housing and diffuser
- LiFePO4 battery technology greatly improves operational life and charging cycle capacity
- Emergency duration: 3 hrs
- Colour temperature: Daylight 6500K
- Emergency lumen output: 20 lm
- Lumen output: 35 lm
- Lamp life: 30,000 hrs
- Guarantee: 2 Years



Code	Type	Legend	Height	Width	Depth	1+	3+
2745-0358	Standard	Exit Arrow Up	185 mm	330 mm	39 mm	£32.75	£31.75

1W LED Non-Maintained Emergency Downlights IP20

- Typically used as an indoor escape route emergency light to help guide occupants from a building
- Interchangeable lenses available to suit specific settings – sold separately
- Emergency duration: 3 hrs
- Colour temperature: Daylight 6500K
- Lumen output: 121 lm
- Lamp life: 30,000 hrs
- Mounted: Recessed
- Guarantee: 2 Years



Includes:
■ Battery pack and driver



Visit cef.co.uk for video demonstration

Code	Type	Beam Angle	Depth	Ø	Cut Out Ø	1+	3+
2628-8332	Standard	120°	50 mm	50 mm	45 mm	£29.95	£27.95

Need a product datasheet?

Download at cef.co.uk

LED FLOODLIGHTS

Guardian LED Floodlights IP65

- Die-cast aluminium powder-coated body
- Ground spike and extension arm sold separately [only compatible with Floodlights up to 50W]
- Can be mounted without removing the bracket
- Colour temperature: Cool white 4000K
- Lamp life: 50,000 hrs
- Guarantee: 5 Years [on-site: 1 year]



2672-6728



- Includes:
- Adjustable bracket
 - 1 m Cable



Visit cef.co.uk for video demonstration

Code	Wattage	Lumens	Height	Width	Depth	1+	3+
C							
2672-6707	15W	1950 lm	198 mm	129 mm	34 mm	£24.50	£23.50
2672-6719	30W	3900 lm	246 mm	173 mm	42 mm	£37.75	£36.75
2672-6728	50W	6500 lm	255 mm	188 mm	42 mm	£56.50	£54.95
2672-6734	80W	10400 lm	302 mm	250 mm	52 mm	£111.50	£108.50
2672-6704	100W	13000 lm	358 mm	279 mm	57 mm	£126.95	£123.95
2672-6710	150W	19500 lm	405 mm	329 mm	62 mm	£156.50	£153.50
2672-6716	250W	32500 lm	471 mm	401 mm	62 mm	£241.95	£238.95



ALL PRICES EXCLUDE VAT

LED WALL PACKS

20W Tri-Colour LED Wall Packs IP65

- Die-cast aluminium body and polycarbonate diffuser
- Push-fit connectors for easy installation
- Selectable colour temperature:
Warm white 3000K, cool white 4000K or daylight 6500K
- Lumen output: 1,500, 1,550 or 1,600 lm
- Lamp life: 50,000 hrs
- Guarantee: 5 Years [on-site: 1 year]



CCT Colour Select



Visit cef.co.uk for video demonstration

Code	Sensor	Height	Width	Depth	1+	3+
2641-1884	No	221 mm	207 mm	82 mm	£79.95	£77.95
2641-1887	Photocell	221 mm	207 mm	82 mm	£89.25	£87.25

Branch opening hours

Mon-Fri 7:30-5:30 Sat 8:30-12:00

[local exceptions may apply]



LED STREET LIGHTING AND ACCESSORIES

Nano LED Road Lanterns IP66

- Die-cast aluminium with polycarbonate lens
- Type: Post top
- Surge protection as standard
- Tool-free maintenance
- Lighting distribution: Type II
- Colour temperature: Cool white 4000K
- Lamp life: 50,000 hrs
- Impact rating: IK08
- Mounted: 60 mm[Ø] Spigot
- Guarantee: 5 Years [on-site: 1 year]

Code	Wattage	Lumens	Length	Width	Depth	1+	3+
Standard							
2275-5130	40W	4400 lm	490 mm	176 mm	78 mm	£176.31	£172.12
2275-5136	60W	6600 lm	490 mm	176 mm	78 mm	£184.72	£180.32
Photocell							
2275-5133	40W	4400 lm	490 mm	176 mm	78 mm	£218.32	£213.12
2275-5139	60W	6600 lm	490 mm	176 mm	78 mm	£226.71	£221.32
2523-2107	80W	8800 lm	610 mm	270 mm	76 mm	£293.92	£286.92
2523-2104	120W	13200 lm	610 mm	270 mm	76 mm	£327.51	£319.72
Code	Height		Ø			1+	3+
NEMA Socket Blanking Cap							
2523-2110	55 mm		80 mm			£10.95	£10.50


FUSION
Luminaires


2523-2110

FROM
£176.31
 +VAT

BOLLARDS

20W / 24W LED Bollard IP65

- Powder-coated aluminium bollard with clear diffuser
- Wattage selectable on-site for improved energy savings
- Colour temperature: Cool white 4000K
- Lumen output [20W]: 1,200 lm
[24W]: 1,500 lm
- Lamp life: 50,000 hrs
- Mounted: Root
- Warranty: 5 Years [on-site: 1 year]

Includes:

- 'J' Bolts
- Fixings
- Base plate
- 1.2 m Prewired cable



Code	Height	Ø	1+	3+
2719-0774	1000 mm	160 mm	£176.95	£173.95

Commercial Bollard IP65

- Die-cast aluminium bollard with clear PMMA diffuser
- Lamp type: ES / E27 [not included]
- Max. LED Lamp wattage: 15W
- Mounted: Root
- Guarantee: 5 Years

Includes:

- 'J' Bolts
- Fixings
- Base plate
- 1 m Prewired cable



Code	Height	Ø	1+	3+
2771-7172	1015 mm	160 mm	£119.95	£116.95

Click & collect

At any branch in the UK



INSECT KILLER LAMPS

Insect Killer Tubes 230V



- It is recommended that insect killer lamps are changed every 12 months as UV levels deteriorate over the life of the lamp
- Deterioration of the lamp means insect attraction rates are significantly reduced
- Lamp life: 8,000 hrs



Code	Length	Wattage	1+	10+
T5				
2090-7061	12"	8W	£11.77	£11.18
T8				
2088-5029	18"	15W	£11.57	£11.05
2094-6910	2 ft	18W	£12.92	£12.40

Essential LED GU10 Lamps 230V
– Pack of 10

- Suitable replacement for 35 and 50W halogen lamps
- Beam angle: 38°
- Lamp life: 20,000 hrs
- Guarantee: 2 Years



NEW

Code	Wattage	Lumens	Colour Temp	Equivalent Price Each	1+
Non-Dimmable					
2818-4602	3.7W	352 lm	Warm White – 3000K	£1.68	£16.75
2818-4515	3.7W	352 lm	Cool White – 4000K	£1.68	£16.75
2818-4590	3.7W	352 lm	Daylight – 6000K	£1.68	£16.75
Dimmable					
2818-4608	3.7W	352 lm	Warm White – 3000K	£2.28	£22.75
2818-4584	3.7W	352 lm	Cool White – 4000K	£2.28	£22.75
2818-4596	3.7W	352 lm	Daylight – 6000K	£2.28	£22.75



ALL PRICES EXCLUDE VAT

LED CAPSULE LAMPS

2W LED G4 Capsule Lamp
– Pack of 2

- Suitable replacement for 10 and 20W halogen lamps
- Lamp life: 15,000 hrs
- Guarantee: 1 Year



ONLY
£10.50
+VAT

Code	Lumens	1+	10+
Non-Dimmable – Warm White – 3000K			
2196-2761	200 lm	£10.50	£9.95

3.3W LED G9 Capsule Lamp
– Pack of 2

- Suitable replacement for 40W halogen lamps
- Lamp life: 15,000 hrs
- Guarantee: 1 Year



ONLY
£10.95
+VAT

Code	Lumens	1+	10+
Non-Dimmable – Warm White – 3000K			
2196-2764	350 lm	£10.95	£10.50

2.6W LED GY6.35 Capsule Lamp 12V



- Suitable replacement for 35W halogen lamps
- Lamp life: 15,000 hrs
- Guarantee: 1 Year



Code	Lumens	1+	10+
Non-Dimmable – Warm White – 3000K			
2786-2006	300 lm	£7.50	£6.95

**Over 390
branches
nationwide**



There's always a branch near you

LED TUBES

LED T8 Tri-Colour Glass Tubes

- Suitable replacement for fluorescent tubes
- Complete with LED starter for use in switch start retrofit installations
- Selectable colour temperature: Warm white 3000K, cool white 4000K and daylight 6500K
- Beam angle: 300°
- Lamp life: 25,000 hrs
- Guarantee: 3 Years

Code	Length	Wattage	Lumens	1+	5+
Non-Dimmable					
2772-8017	2 ft	9W	1080 lm	£8.05	£7.75
2772-8020	3 ft	14W	1680 lm	£11.25	£10.80
2772-8023	4 ft	18W	2160 lm	£13.95	£13.50
2772-8026	5 ft	24W	2880 lm	£16.35	£15.65
2772-8029	6 ft	30W	3600 lm	£29.95	£28.95




FROM
£8.05
+VAT

LED LAMPS

8W G24 LED Lamps

- Suitable replacement for 18 and 26W compact fluorescent lamps
- Rotating end cap
- Lamp life: 25,000 hrs
- Guarantee: 3 Years

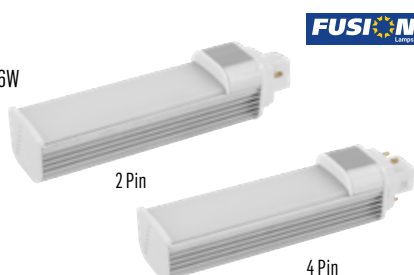

Code	Cap	Length	Lumens	1+	10+
Non-Dimmable – Cool White – 4000K					
2275-5286	G24 2 Pin	145 mm	800 lm	£16.95	£16.50
2275-5325	G24 4 Pin	145 mm	800 lm	£16.95	£16.50

LED Retrofit Discharge Lamps


- Suitable replacement for 70W HID lamps
- Beam angle: 300°
- Lamp life: 25,000 hrs
- Guarantee: 3 Years



Code	Wattage	Cap	Length	Ø	Lumens	1+
Non-Dimmable – Daylight – 6000K						
1414-1569	11W	ES / E27	165 mm	65 mm	1150 lm	£45.75
2253-2830	15W	ES / E27	165 mm	65 mm	1575 lm	£49.95

LED 2D Lamps

- Suitable replacement for 16, 28 and 38W compact fluorescent 2D lamps
- Lamp life: 30,000 hrs
- Guarantee: 3 Years

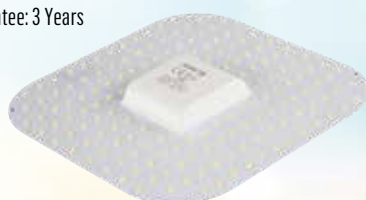

FROM
£19.75
+VAT

Code	Wattage	Cap	Lumens	1+	10+
Non-Dimmable – Cool White – 4000K					
2123-0989	8W	GR8 2 Pin	800 lm	£19.75	£18.75
2123-0992	8W	GR10q 4 Pin	800 lm	£19.75	£18.75
2123-0980	14W	GR8 2 Pin	1400 lm	£21.95	£20.95
2123-0983	14W	GR10q 4 Pin	1400 lm	£21.95	£20.95
2123-0986	18W	GR10q 4 Pin	2000 lm	£26.95	£25.95

WEEE recycling

Ask in branch or visit
cef.co.uk/waste-recycling

LED LAMPS

LED Retrofit Discharge Lamps

- Suitable replacement for lowbays, highbays, floodlights and lantern HID lamps
- Beam angle: 300°
- Guarantee: 3 Years
- Lamp life: 25,000 hrs

Code	Wattage	Cap	Length	Ø	Lumens	Replacement For	1+
Non-Dimmable – Daylight – 6000K							
2448-1897	20W	ES / E27	178 mm	93 mm	2600 lm	70W HID	£48.95
2448-1903	30W	ES / E27	188 mm	93 mm	3900 lm	70 - 150W HID	£60.85
2448-1900	30W	GES / E40	208 mm	93 mm	3900 lm	70 - 150W HID	£60.85
2448-1906	60W	GES / E40	280 mm	93 mm	8000 lm	250W HID	£73.75
2448-1909	85W	GES / E40	285 mm	106 mm	11000 lm	250 - 400W HID	£88.50
2448-1891	100W	GES / E40	288 mm	120 mm	13000 lm	250 - 400W HID	£98.50
2448-1894	120W	GES / E40	308 mm	120 mm	15000 lm	400W HID	£114.95

2448-1903



FUSION Lamps



2448-1891

FROM
£48.95
+VAT

8W LED G12 Discharge Lamp

FUSION Lamps

- Suitable replacement for 35 - 70W metal halide lamps
- Beam angle: 270°
- Lamp life: 30,000 hrs
- Guarantee: 3 Years



Code	Length	Ø	Lumens	1+
Non-Dimmable – Cool White – 4000K				
2612-4382	95 mm	30 mm	1100 lm	£33.50

2G11 LED PLL Lamps

FUSION Lamps

- Suitable replacement for 18 - 55W compact fluorescent lamps
- Lamp life: 20,000 hrs
- Guarantee: 3 Years



Code	Length	Length	Lumens	1+	10+
Non-Dimmable – Cool White – 4000K					
1653-8089	8W	225 mm	900 lm	£15.75	£15.25
2345-5771	12W	315 mm	1350 lm	£16.25	£15.75
653-5578	16W	415 mm	1800 lm	£16.95	£16.50
2345-5777	20W	540 mm	2350 lm	£17.95	£17.50

INFRARED HEAT LAMPS

R7s Infrared Heat Lamp

FUSION Lamps

- Cap: R7s



Code	Length	Wattage	Lamp Life	1+	10+
Clear					
0305-6371	118 mm	300W	1000 hrs	£13.76	£12.73

R7s Protected Infrared Lamp

FUSION Lamps

- Protective glass sleeve around the lamp
- Cap: R7s



ONLY
£29.18
+VAT

Code	Length	Wattage	Lamp Life	1+	10+
0648-1090	118 mm	300W	4000 hrs	£29.18	£28.15

R125 Infrared Heat Lamp

FUSION Lamps

- Cap: ES / E27
- Lamp life: 5,000 hrs



ONLY
£12.18
+VAT

Code	Wattage	1+	10+
Clear			
0531-3706	250W	£12.18	£11.40

Free tea, coffee & Wi-Fi
When you visit our branches



PANEL HEATERS

Low Surface Temperature Panel Heaters



- Durable, slim and contemporary design
- Suitable for healthcare applications as maximum surface temperature is limited to 43°C
- Seven day electronic timer with six On / Off periods per day
- Four operating modes: Programme, boost, setback and manual
- Intelligent fan control automatically adjusts fan speed to eliminate pushing out cool air on start up
- Fan only mode for air circulation
- Concealed, easy-to-read display with electronic child lock
- Open window technology
- Mounted: Wall
- IP24
- Complies with Lot 20
- On-site warranty: 2 Years



Includes:

- Hinged wall bracket
- 1.1 m Cable

Code	Power Rating	Height	Width	Depth	1+	3+
2776-1053	500W	430 mm	506 mm	93 mm	£305.86	£301.74
2776-1059	750W	430 mm	506 mm	93 mm	£317.19	£313.07
2776-1038	1kW	430 mm	640 mm	93 mm	£328.52	£324.40
2776-1044	1.5kW	430 mm	892 mm	93 mm	£376.93	£372.81

DESK FANS

Oscillating Desk Fans



- Adjustable tilt
- Operation type: Piano switch
- Guarantee: 1 Year



Includes:

- 1.5 m Cable and plug

Code	Size	Power Rating	No. of Speeds	1+	3+
2756-9824	9"	30W	2	£22.14	£21.06
2756-9803	12"	40W	3	£23.71	£22.63

Branch opening hours

Mon-Fri 7:30-5:30 Sat 8:30-12:00

[local exceptions may apply]

HAND DRYERS

1.1 kW ABS High-Speed Hand Dryer



- Sensing distance: 100 mm
- Drying time: 10 secs
- Dimensions: 248 mm[H] x 250 mm[W] x 114 mm[D]
- IPX1
- Exchange warranty: 2 Years



Code	Air Speed	Decibel Rating	1+	2+
2148-9250	90 m/s	68 dB[A] @ 1 m	£138.99	£135.88

1.8 kW High-Speed Hand Dryers



- Sensing distance: 120 mm
- Drying time: 10 secs
- Dimensions: 320 mm[H] x 290 mm[W] x 170 mm[D]
- IPX1
- Exchange warranty: 2 Years



ONLY
£172.91
+VAT

Code	Air Speed	Decibel Rating	1+	2+
2148-9253	90 m/s	75 dB[A] @ 1 m	£172.91	£169.69

1.5 kW ABS Hand Dryer



- Sensing distance: 100 mm
- Drying time: 30 - 45 secs
- Dimensions: 243 mm[H] x 194 mm[W] x 135 mm[D]
- IP22
- Guarantee: 1 Year



Code	Air Speed	Decibel Rating	1+	2+
1010-8993	14.5 m/s	75 dB[A] @ 1 m	£77.26	£74.03

2.5 kW Brushed Stainless Steel Hand & Face Dryer



- 360° Swivel nozzle
- Sensing distance: 100 mm
- Drying time: 30 - 45 secs
- Dimensions: 240 mm[H] x 270 mm[W] x 190 mm[D]
- IPX1
- Guarantee: 1 Year



Code	Air Speed	Decibel Rating	1+	2+
1015-3111	30 m/s	85 dB[A] @ 1 m	£158.70	£155.45

HAND DRYERS

1.5 kW ABS Hand Dryer

- Sensing distance: 120 mm
- Drying time: 60 secs
- Dimensions: 282 mm[H] x 225 mm[W] x 160 mm[D]
- IPX1
- Guarantee: 2 Years

ADDVENT

ONLY
£84.91
+VAT

Code	Air Speed	Decibel Rating	1+	2+
2149-2910	12 m/s	45 dB[A] @ 1.5 m	£84.91	£81.81

2.3 kW ABS Hand Dryer

- Sensing distance: 120 mm
- Drying time: 60 secs
- Dimensions: 235 mm[H] x 267 mm[W] x 210 mm[D]
- IPX1
- Guarantee: 2 Years

ADDVENT



Code	Air Speed	Decibel Rating	1+	2+
2149-2913	20 m/s	65 dB[A] @ 1.5 m	£110.49	£107.35

3-IN-1 AIR CONDITIONER, COOLING FAN & DEHUMIDIFIERS

3-In-1 Portable Air Conditioner, Cooling Fan and Dehumidifier

ADDVENT

- Compact, portable air conditioning unit with HEPA filter, castors and handle
- Complete air quality solution for use in areas up to 20 m²
- Speeds: 2
- Programmable timer: 24 hr
- Easily adjust settings via the remote control handset (included)
- Power rating: 1 kW
- Operating temperature: 18 - 32°C
- 9,000 BTU
- Sleep mode
- Exchange warranty: 1 Year

Includes:

- Window fitting kit
- Continuous draining hose
- Remote control
- 1.5 m Exhaust hose

ONLY
£415.14
+VAT

Code	Extraction	Capacity	Decibel Rating	Height	Width	Depth	1+
2248-7518	22 Ltrs per Day	0.5 Ltr	65 dB	770 mm	317 mm	402 mm	£415.14

AIR CURTAINS

Surface Air Curtain

- For installation above external doors to reduce heat loss
- Three heat settings
- Fan only setting for air circulation
- Overheat safety cut-out
- On-site warranty: 2 Years

Includes:

- Adjustable mounting bracket



HEATSTORE

Code	Power Rating	Decibel Rating	Airflow	Height	Width	Depth	1+	3+
0546-2002	3 kW	46 dB[A] @ 1 m	185 m ³ /h	211 mm	622 mm	115 mm	£263.50	£258.25

ONLY
£263.50
+VAT

3 kW Surface Air Curtain

- Suitable for small doorways
- Two heat settings
- Fan only setting for air circulation
- Overheat safety cut-out
- Mounted: Wall or ceiling
- Guarantee: 2 Years

Includes:

- Adjustable mounting bracket
- 1.5 m Cable



Levante

Code	Decibel Rating	Airflow	Height	Width	Depth	1+	3+
230V [Single Phase]							
1627-9894	60 dB[A] @ 300 mm	254 m ³ /h	210 mm	580 mm	106 mm	£98.95	£95.50

ONLY
£98.95
+VAT

SURGE ARRESTERS

Four Module Surge Protection Device

- Suitable for use with most brands of distribution boards
- Protects against indirect lightning effects and transient surges
- Prolongs the life of appliances and sensitive electronic equipment
- Visual and remote end-of-life indication
- Recommended backup MCB: 32A
- Mounted: DIN rail
- BS EN 61643-11 and BS EN 62305
- Warranty: 10 Years
[enclosure: 1 Year]

MCG
INDUSTRIAL

18th
EDITION



Code	Height	Width	Depth	No. of Ways	1+
Device Complete with Metal Enclosure [IP20]					
2441-3887	175 mm	110 mm	82 mm	4	£122.50

Single Module Surge Protection Device

- Suitable for use with most brands of distribution units
- Protects against indirect lightning effects and transient surges
- Prolongs the life of appliances and sensitive electronic equipment
- Visual end-of-life indication
- Recommended backup MCB: 16 - 32A
- SPD Complete with metal enclosure
[2441-3893] includes one spare way for backup MCB
- Mounted: DIN rail
- BS EN 61643-11 and BS EN 62305
- Warranty: 10 Years
[enclosure: 1 Year]

MCG
INDUSTRIAL

18th
EDITION



Code	Type	Suitable For	No. of Poles	No. of Modules	1+
2433-7003	2 + 3	TN-S, TN-C-S and TT	1P+N	1	£48.25

Surge Protection Device with Backup MCB

- Suitable for use with most brands of consumer units
- Protects against indirect lightning effects and transient surges
- Prolongs the life of appliances and sensitive electronic equipment
- Visual and remote end-of-life indication
- Backup MCB rating: 32A
- Mounted: DIN rail
- BS EN 61643-11
- Warranty: 1 Year

MCG
INDUSTRIAL

18th
EDITION



Visit cef.co.uk for
video demonstration

Code	Type	Suitable For	1+
Device with Cables and 32A B Curve MCB [6 kA]			
2696-8078	2	TN-S, TN-C-S and TT Earthing	£33.75

MOTOR STARTERS AND ACCESSORIES

400V DC Injection Braking Module

- Controlled stopping in compliance with PUWER 98
- Can be used to retrofit and to integrate with existing controls
- Simple braking time and torque setting
- Direct on line or star-delta systems
- BS EN 60947

Crompton
controls



Code	Height	Width	Depth	1+
0577-6315	81 mm	45 mm	121 mm	£349.95

400V DOL DC Injection Braking Units with Overload

- Robust, pressed steel enclosure with removable lid and large Start / Stop buttons
- Start, protect and safety stop for standard rotating machines
- Controlled stopping in compliance with PUWER 98 [not for instant motor stopping applications]
- Simple braking time and torque setting
- Suitable for up to twelve stops per hour
- Mounted: Surface
- IP55
- BS EN 60947

Crompton
controls



Code	kW Rating	Overload Rating	1+
1033-2955	2.2 kW	4 - 6A	£619.95
1033-2964	5.5 kW	10 - 13A	£676.95

Enclosed Contactors

- Ideal for heating and lighting applications
- Pressed steel enclosure: RAL7035
- Top and bottom cable gland knockouts
- IP55
- BS EN 60947

Crompton
controls



Code	Current Rating AC1	Contact Configuration	Height	Width	Depth	1+
3 Pole + N with Fuse Protection						
0013-4635	25A	3 NO	184 mm	184 mm	149 mm	£115.75
0013-4638	40A	3 NO	184 mm	184 mm	149 mm	£148.50
4 Pole with Neutral Block						
2077-3264	25A	4 NO	184 mm	184 mm	149 mm	£129.95

MODULAR CONTACTORS

Modular Contactors

- Ideal for switching heating and lighting applications
- Coil voltage: 230V AC
- Mounted: DIN rail
- BS EN 61095

1469-6029

FROM
£20.95
 +VAT

Code	Current Rating	No. of Modules	Contact Configuration	1+
2 Pole				
1469-6029	20A	1	2 NO	£20.95
4 Pole				
1469-4562	25A	2	4 NO	£34.10
1462-6381	40A	3	4 NO	£45.75

TIME SWITCHES

16A 7 Day / 24 Hour Time Switch

- Ideal for controlling heating, lighting and security applications
- Six On / Off programmes per day
- Manual override
- Min. Switching time: 1 min
- Battery backup: 100 hrs
- Volt-free contact
- Load rating: 16A [2A inductive]
- Mounted: DIN rail
- BS EN 60730-1

ONLY
£25.75
 +VAT

Code	No. of Channels	1+
2292-7510	1	£25.75

Same day delivery

If ordered before 12:00pm

COMPRESSION GLANDS

Nylon Glands with Locknut IP68

- For use with round cable only
- Supplied with washer and locknut
- Operating temperature: -40 to 100°C [intermittent to 120°C]
- BS EN 62444

FROM
£9.35
 +VAT

Code	Thread Size	Colour	Cable Size Ø	Pack	1+	5+
0070-2535	20 mm	Black	6 - 12 mm	10	£9.35	£9.05
0013-6687	20 mm	Grey	6 - 12 mm	10	£9.35	£9.05
0070-2538	20 mm	Red	6 - 12 mm	10	£9.35	£9.05
0070-2541	20 mm	White	6 - 12 mm	10	£9.35	£9.05
0070-2553	25 mm	Black	13 - 18 mm	10	£12.75	£12.25
0070-2571	32 mm	Black	16 - 21 mm	10	£21.25	£20.05

DIN RAIL ENCLOSURES AND ACCESSORIES

Metalclad DIN Rail Enclosures IP20

- Non-combustible metalclad enclosure
- Multiple knockouts for cable entry
- Raised keyholes for easy installation
- BS EN 61439-3



Includes:

- DIN rail
- Earth bar

Code	No. of Modules	Height	Width	Depth	1+
Top Hinged Door					
2191-0543	4	175 mm	110 mm	82 mm	£22.25
2191-0540	4	225 mm	115 mm	82 mm	£24.75

Metalclad DIN Rail Enclosure IP65

- Non-combustible metalclad enclosure
- Multiple knockouts for cable entry
- Raised keyholes for easy installation
- BS EN 61439-3



Includes:

- DIN rail
- Neutral and earth terminals
- Busbar

Code	No. of Modules	Height	Width	Depth	1+
Top Hinged Door					
2275-1353	4	220 mm	140 mm	100 mm	£33.25

METALCLAD CONSUMER UNITS AND ACCESSORIES

Mains Incomer - Surge Protected

- Non-combustible metalclad consumer units
- Ferruled cable ends for secure connections
- Knockouts: M25, M32 and M40
- IP20
- BS EN 61439-3



SPD Fitted



Includes:

- 100A 2 Pole isolator
- Type 2 surge protection device – [2696-8078]
- Backup 32A B curve MCB [6 kA]

Code	No. of Ways	Height	Width	Depth	1+
2711-1355	4	235 mm	233 mm	110 mm	£52.50
2713-0027	12	235 mm	377 mm	110 mm	£83.25
2713-0030	14	235 mm	377 mm	110 mm	£84.95

Mains Incomer

- Non-combustible metalclad consumer units
- Knockouts: M25, M32 and M40
- IP20
- BS EN 61439-3



Includes:

- 2 Pole isolator

Code	No. of Ways	Height	Width	Depth	1+
100A Isolator – Single Row					
2073-7342	2	235 mm	125 mm	110 mm	£34.95
2073-7348	4	235 mm	161 mm	110 mm	£42.50
2073-7366	6	235 mm	197 mm	110 mm	£45.25

Arc Fault Detection Devices

- Built-in LED indicator shows fault status
- Combines arc fault detection with RCBO functions
- Series and parallel arc fault detection
- Sensitivity: 30 mA [6 kA]
- Mounted: DIN rail
- BS EN 62606



18th
EDITION



Includes:

- Prewired neutral cable

Code	Current Rating	1+
B Curve 6 kA – Type A		
2577-8644	6A	£99.95
2577-8704	16A	£99.95
2577-8710	20A	£99.95
2577-8722	32A	£99.95
2577-8728	40A	£99.95

Bi-Directional Single Pole Single Module Compact RCBOs

- Integrates residual and overcurrent protection in one device
- Incoming cables can be connected at the top or bottom with bi-directional protection
- Built-in switched neutral
- Test button and trip indicator
- Sensitivity: 30 mA [6 kA]
- Mounted: DIN rail



NEW

Code	Current Rating	1+
B Curve 6 kA		
2797-8712	6A	£15.95
2797-8697	16A	£15.95
2797-8706	32A	£15.95
2797-8709	40A	£15.95

Same day range

Almost 3,000 everyday essential products available in branch to take away today



ELECTRICITY METERS

45A Single Phase Single Module Energy Meter

- Designed to measure and display active energy consumption [kWh] within a consumer unit or modular enclosure
- Self-supplied
- Blue, easy-to-read backlit display
- Impulse constant: 1,000 imp / kWh
- Voltage rating: 230V
- MID B and D Certified
- Mounted: DIN rail
- EN 50470-1-3

MCG
INDUSTRIAL

Code	1+
0702-9838	£34.50

100A Single Phase Electricity Meter

- Accurately measures and displays active energy consumption [kWh] in a compact, surface mounted enclosure
- Large, easy-to-read LCD can be configured to auto-cycle any of the available registers or remain static
- Optical port for configuration or meter reading
- Highly reliable and capable of withstanding high voltage events and overcurrent without failure
- Tamper resistant with reverse-energy fraud detection and sealing for life
- MID Certified
- EN 50470-1-3

MCG
INDUSTRIALONLY
£49.25
+VAT

Code	Height	Width	Depth	1+
2027-1052	91 mm	125 mm	40 mm	£49.25

ROTARY ISOLATOR SWITCHES

Enclosed Rotary Isolators IP65

- Flame-retardant ABS plastic
- Easy access and switch removal
- Current rating: AC21 [resistive loads]
- Padlockable in the Off position
- Cable entry: 20 mm[Ø] Knockouts
- Mounted: Surface
- BS EN 60947-3

Code	Current Rating	Height	Width	Depth	1+
3 Pole					
0576-1585	20A	125 mm	100 mm	74 mm	£20.05
0433-2007	32A	125 mm	100 mm	74 mm	£26.25
1462-6486	40A	125 mm	100 mm	74 mm	£31.75
0433-2019	63A	175 mm	125 mm	90 mm	£34.65
4 Pole					
0576-1588	20A	125 mm	100 mm	74 mm	£21.50
0433-2013	32A	125 mm	100 mm	74 mm	£28.50
1462-6492	40A	125 mm	100 mm	74 mm	£35.95
0433-2025	63A	175 mm	125 mm	90 mm	£36.95

MAINS ISOLATOR SWITCH FUSES

SP+N Mains Isolator Switch Fuse

- Robust metalclad enclosure
- M20 and M25 knockouts top and bottom
- Five terminal earth bar
- IP20
- BS EN 61439-3

Includes:

- 100A 2 Pole isolator
- Fuse carrier
- 63A HRC ME Fuse
- 80A HRC ME Fuse
- 100A HRC ME Fuse

MCG
INDUSTRIALONLY
£54.95
+VAT

Code	Current Rating	Height	Width	Depth	1+
Single Pole + N					
2302-9522	63A / 80A / 100A	225 mm	115 mm	82 mm	£54.95

INDUSTRIAL SWITCHGEAR

TP+N Metal Switch Fuses

- Robust metalclad enclosure
- M20 and M25 knockouts top and bottom
- Five terminal earth bar
- IP20
- BS EN 61439-3

MCG
INDUSTRIAL

Includes:

- BS 88 Bolt-in fuses

Code	Current Rating	Height	Width	Depth	1+
3 Pole + N					
2453-6014	200A	500 mm	400 mm	200 mm	£924.95
2453-6017	250A	500 mm	400 mm	200 mm	£964.95
2453-6020	315A	800 mm	600 mm	300 mm	£1,347.50
2453-6023	400A	800 mm	600 mm	300 mm	£1,446.95

ROTARY ISOLATOR SWITCHES

Enclosed Rotary Isolators IP65

- Flame-retardant ABS plastic
- Easy access and switch removal
- Current rating: AC21 [resistive loads]
- Padlockable in the Off position
- Cable entry: 20 mm[Ø] Knockouts
- Mounted: Surface
- BS EN 60947-3

Code	Current Rating	Height	Width	Depth	1+
3 Pole					
0576-1585	20A	125 mm	100 mm	74 mm	£20.05
0433-2007	32A	125 mm	100 mm	74 mm	£26.25
1462-6486	40A	125 mm	100 mm	74 mm	£31.75
0433-2019	63A	175 mm	125 mm	90 mm	£34.65
4 Pole					
0576-1588	20A	125 mm	100 mm	74 mm	£21.50
0433-2013	32A	125 mm	100 mm	74 mm	£28.50
1462-6492	40A	125 mm	100 mm	74 mm	£35.95
0433-2025	63A	175 mm	125 mm	90 mm	£36.95

FROM
£20.05
+VAT

ROTARY ISOLATOR SWITCHES

Enclosed Rotary Isolators IP65

- Flame-retardant ABS plastic
- Easy access and switch removal
- Current rating: AC21 [resistive loads]
- Padlockable switch
- Cable entry: 20 mm[Ø] Knockouts
- Mounted: Surface
- BS EN 60947-3



MCG
INDUSTRIAL

Code	Current Rating	Height	Width	Depth	1+
4 Pole					
1462-6426	100A	280 mm	190 mm	130 mm	£98.25

FOOT & PALM SWITCHES

Emergency Stop Switches

- Surface mounted, insulated emergency stop switch
- Mushroom head: 90 mm[Ø]
- Operating temperature: -25 to 70°C
- Mechanical durability: 300,000 Operations
- BS EN 60947-5-1



MCG
INDUSTRIAL

Code	Contact Configuration	Operation	Colour	1+
IP65				
1442-5978	1 NC	Pull Release	Red / Yellow / Grey	£43.50
1442-5984	2 NC	Pull Release	Red / Yellow / Grey	£43.50

FIRE ALARM ACCESSORIES

Fireman's Switch

- Die-cast aluminium switch disconnecter
- Operates with fireman's hook or axe – pull down to switch Off
- Two-handed switch On
- 25A 2 Pole 230V AC
- Cable entry: 2 x M25 Glands top and bottom
- IP54
- IEC 60947-1 and 3
- Guarantee: 1 Year



MCG
INDUSTRIAL

Includes:

- PE Terminal and membrane gland [IP54]
- 'Fireman Switch' label
- 4 x M25 Sealing plugs



Code	1+	3+
2296-2532	£196.95	£192.50

PUSHBUTTONS & STATIONS

Made Up Pushbutton Stations IP65

- Pre-assembled pushbutton stations complete with contact blocks
- 10A at 230V AC, 3A at 24V DC
- Mounted: Surface
- BS EN 60947-5-1



FROM
£27.95
+VAT

Code	Colour	Contact Configuration	Operation	1+
Plastic				
0013-6954	Yellow	1 NC	Emergency Stop, Twist Release	£27.95
0013-6960	Yellow	1 NC	Emergency Stop, Key Release	£36.75

10A Emergency Stop Pushbuttons IP65

- Suitable for panel door and enclosed control station mounting
- Mushroom head
- Complete with mounting coupler and contact block
- Cut out: 22.5 mm[Ø]
- IP65 [when assembled]
- BS EN 60947-5-1



MCG
INDUSTRIAL

Includes:

- 2 x Keys [0043-7353 only]

Code	Operation	Contact Configuration	1+
0043-7377	Twist Release	1 NC	£19.95

PVC ADAPTABLE BOXES

Empty Enclosures IP66

- Screw-on flat lid
- Plain sides

2094-6730

MCG
INDUSTRIAL

FROM
£4.90
+VAT

Code	Colour	Length	Width	Depth	Price			
Stainless Steel Screws								
2094-6730	Black	100 mm	100 mm	50 mm	1+	£4.90	5+	£4.70
1866-0130	Grey	110 mm	150 mm	70 mm	1+	£7.95	5+	£7.75
1900-2097	Grey	145 mm	190 mm	72 mm	1+	£14.75	5+	£14.55
1868-7352	Grey	190 mm	243 mm	90 mm	1+	£24.75	5+	£23.95
Nylon Screws								
1829-8504	Grey	220 mm	300 mm	120 mm	1+	£36.25	5+	£35.50

DIN RAIL ENCLOSURES & ACCESSORIES

Plastic DIN Rail Enclosures IP65

MCG
INDUSTRIAL

- Manufactured from tough, flame retardant ABS
- Multiple knockouts for cable entry
- Snap closing top hinged, tinted front window
- Will fit a range of modular devices
- BS EN 60529

Includes:

- DIN rail


ONLY
£25.25
 +VAT

Code	No. of Modules	Height	Width	Depth	1+
Top Hinged Door – Grey					
1868-7415	5	158 mm	118 mm	92 mm	£25.25

ENCLOSURES

Sheet Steel Enclosures with Mounting Plates IP65

MCG
INDUSTRIAL

- Galvanised sheet steel enclosure with polyurethane gasket for improved durability
- Recessed gland plate, top or bottom, and reversible door with T-bar lock
- KEMA Certification
- BS EN 60529

Includes:

- Zinc-plated backplate [2 mm]
- Mounting kit
- Key


FROM
£97.95
 +VAT

Code	Height	Width	Depth	1+	3+
1434-9454	400 mm	300 mm	200 mm	£97.95	£92.95
1434-9457	400 mm	400 mm	200 mm	£116.75	£111.75

Stainless Steel Enclosures with Mounting Plates IP65

MCG
INDUSTRIAL

- Grade 304 stainless steel enclosure with polyurethane gasket for improved durability
- Reversible door hanging with standard stainless steel lock
- KEMA Certification
- BS EN 60529

Includes:

- Zinc-plated backplate [2 mm]
- Key



Code	Height	Width	Depth	1+	3+
1434-9481	400 mm	400 mm	200 mm	£224.75	£219.75

INDUSTRIAL PLUGS & SOCKETS

230V Plugs & Sockets IP44

MCG
INDUSTRIAL

- Corrosion and impact-resistant thermoplastic
- Operating temperature: -25 to 50°C
- IEC 60309-1 and 2



2073-6742

2070-9244

FROM
£3.95
 +VAT

Code	Current Rating	Type	Price		
2P+E 3 Pin					
2073-6742	16A	Plug – Cable Gland	1+	£3.95	10+ £3.80
2070-9226	16A	Coupler – Cable Gland	1+	£4.05	10+ £3.85
2070-9220	32A	Plug – Cable Gland	1+	£8.50	5+ £8.25
2070-9244	32A	Coupler – Cable Gland	1+	£10.80	5+ £10.45

110V Plugs and Sockets IP44

MCG
INDUSTRIAL

- Corrosion and impact-resistant thermoplastic
- Operating temperature: -25 to 50°C
- IEC 60309-1 and 2



2070-9208

2070-9223

Code	Current Rating	Type	Price		
2P+E 3 Pin					
2070-9208	16A	Plug – Cable Gland	1+	£3.55	10+ £3.40
2070-9223	16A	Coupler – Cable Gland	1+	£4.05	10+ £3.85

415V Plugs IP44

MCG
INDUSTRIAL

- Corrosion and impact-resistant thermoplastic
- Operating temperature: -25 to 50°C
- IEC 60309-1 and 2



2070-9232

Code	Current Rating	Type	Price		
3P+N+E 5 Pin					
2070-9214	16A	Plug – Cable Gland	1+	£6.35	10+ £6.10
2070-9232	32A	Plug – Cable Gland	1+	£10.50	5+ £9.95

Open an account
 Online or in branch

INDUSTRIAL PLUGS & SOCKETS

230V Interlocked Switched Socket IP44

MCG
INDUSTRIAL

- Corrosion and impact-resistant thermoplastic
- Padlockable rotary switch
- Operating temperature: -25 to 40°C
- IEC 60309-1, 2 and 4



Code	Current Rating	1+	3+
2P+E 3 Pin			
1453-9165	16A	£39.50	£37.50

415V Interlocked Switched Sockets IP44

MCG
INDUSTRIAL

- Corrosion and impact-resistant thermoplastic
- Padlockable rotary switch
- Operating temperature: -25 to 40°C
- IEC 60309-1, 2 and 4



Code	Current Rating	1+	3+
3P+N+E 5 Pin			
1453-9180	32A	£58.95	£56.95

FLEXIBLE CONDUIT & ACCESSORIES

Polypropylene Contractor Packs

MCG
INDUSTRIAL

- Self-extinguishing, low smoke and fume
- UV Stabilised
- Temperature range: 0 - 95°C
- IP51
- BS 4607



Pack contents:

- 10 m Conduit
- 10 x Glands and locknuts

FROM
£15.65
+VAT

Code	Ø	Colour	1+	5+
0013-6879	20 mm	Black	£15.65	£14.65
0013-6885	25 mm	Black	£29.25	£28.25

SAFETY LOCKOUT KITS & ACCESSORIES

Personal Lockout Kit

MCG
INDUSTRIAL

Kit includes:

- Red safety padlock (1 key)
- Aluminium MCB toggle lockout
- Universal MCB lockout
- Reusable lockout tag
- Cable ties
- Mini pouch



Code	1+
2483-8705	£18.25

Contractor Lockout Kit

MCG
INDUSTRIAL

- Ideal for a contractor working on commercial, industrial or domestic installations and routine maintenance schedules



Kit contents:

- Red safety padlock (1 key)
- Grip tight MCB lockout (over toggle)
- Grip tight MCB lockout (sideways)
- Plunge MCB lockout (pin-in)
- Plunge MCB lockout (pin-out)
- Universal MCB lockout
- Steel lockout hasp
- 5 x Reusable lockout tags
- 5 x Cable ties
- Non-permanent pen
- Zipped carry bag



2483-8717

ONLY
£65.95
+VAT

Need a product datasheet?



Download at cef.co.uk

Free of Charge Services

We offer some free of charge services that you may be interested in, these include **Lighting Design, Heating Design, Ventilation Design & Energy Saving Audits.**

Whether you're planning a new installation or upgrading an existing system, we have a nationwide team of experts available to help you.

Please contact your local CEF Branch to arrange an appointment.

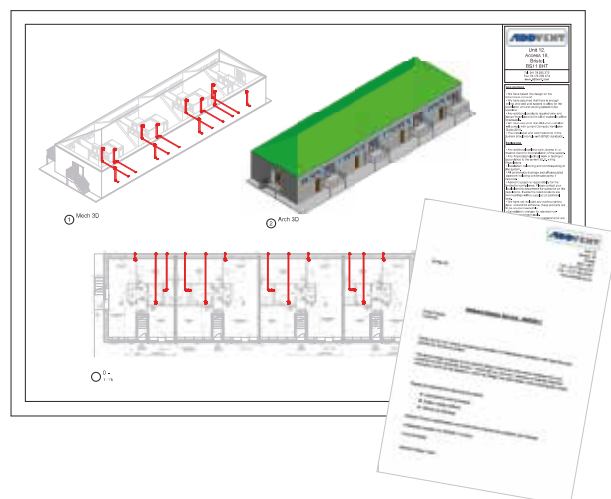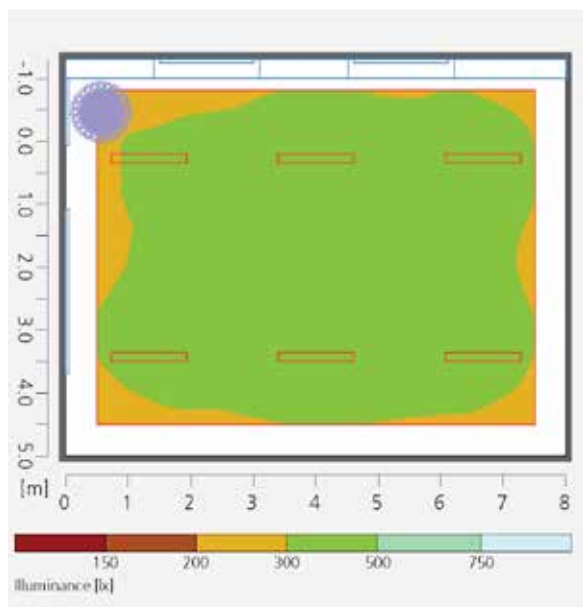

**YOUR
ELECTRICAL
EXPERTS**

Contact your local branch for more details

